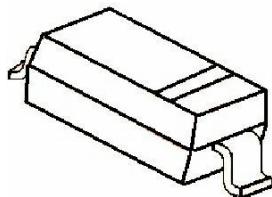


SOD-323 贴片塑封肖特基二极管
SOD-323 Plastic-Encapsulate Schottky Barrier Diode

SOD-323

Marking: BAT42WS: S7
 BAT43WS: S8

特征 Features

- # 大电流承受能力。High Current Capability
- # 正向压降低。Low Forward Voltage Drop

机械数据 Mechanical Data

- # 封装: SOD-323 封装 SOD-323 Small Outline Plastic Package
- # 极性: 色环端为负极 Polarity: Color band denotes cathode end
- # 环氧树脂 UL 易燃等级 Epoxy UL: 94V-0
- # 安装位置: 任意 Mounting Position: Any

极限值和温度特性(TA = 25°C 除非另有规定)

Maximum Ratings & Thermal Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)





参数 Parameters	符号 Symbol	BAT42WS/BAT43WS		单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	V _{RRM}	30		V
最大均方根电压 Maximum RMS voltage	V _{RMS}	21		V
最大直流阻断电压 Maximum DC blocking voltage	V _{DC}	30		V
最大正向平均整流电流 Maximum average forward rectified current	I _{FM}	200		mA
峰值重复正向电流 Repetitive Peak Forward Current @t<1.0s	I _{FRM}	500		mA
峰值正向浪涌电流 8.3ms 单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	I _{FSM}	4.0		A
典型热阻 Typical thermal resistance	R _{θJA}	500		°C/W
功率消耗 Power Dissipation	PD	200		mW
结温 Junction Temperature	T _j	125		°C
存储温度 Storage temperature range	T _{STG}	-55~+150		°C


电特性 (TA = 25°C 除非另有规定)

Electrical Characteristics (Ratings at 25°C ambient temperature unless otherwise specified).

参数 Parameters	符号 Symbol	测试条件 Test conditions	Min	Typ	Max	单位 Unit
最大正向电压 Maximum forward voltage	BAT42WS/BAT43WS	V _F	IF = 200mA		1.0	V
		V _F	IF = 10mA		0.40	
		V _F	IF = 50mA		0.65	
		V _F	IF = 2.0mA	0.26	0.33	
		V _F	IF = 15mA		0.45	
最大反向电压 Maximum reverse breakdown voltage	V _R	IR=10uA	30			V
最大反向电流 Maximum reverse current	I _R	VR=25V			0.5	uA
典型结电容 Type junction capacitance	C _j	VR = 1.0V, f = 1MHz			10	pF
反向恢复时间 Reverse recovery time	t _{rr}	IF=IR=10mA I _{rr} =0.1xI _R ,RL=100 Ω			5	nS

Typical Characteristics

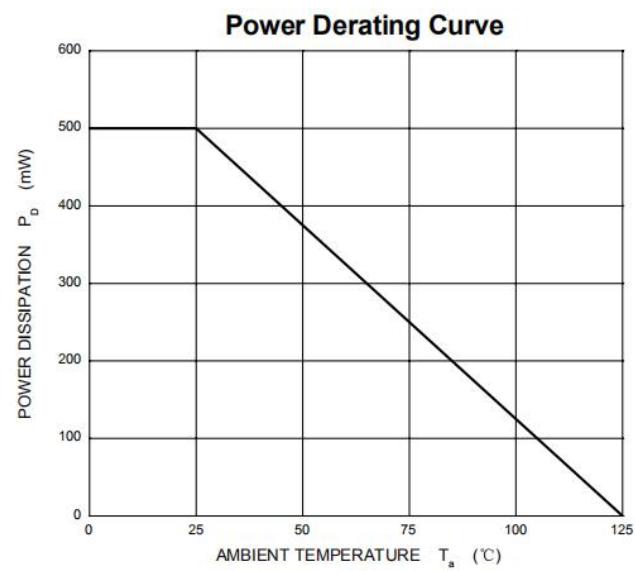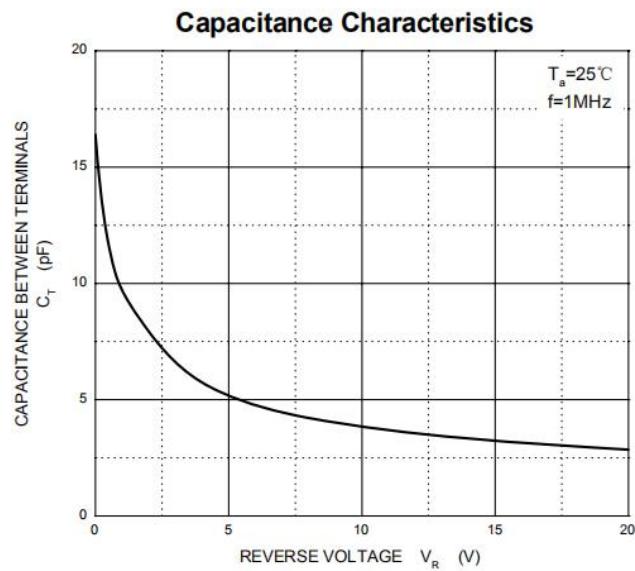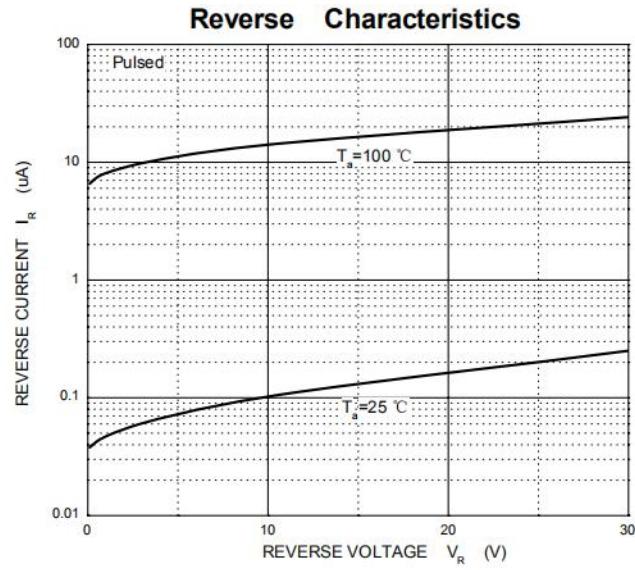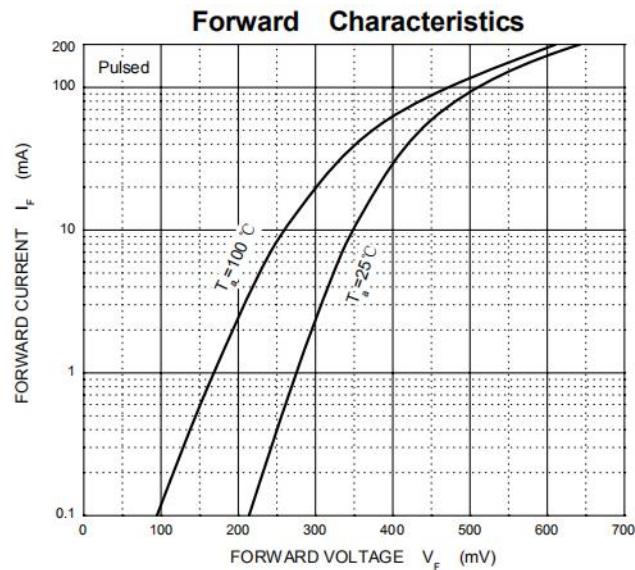

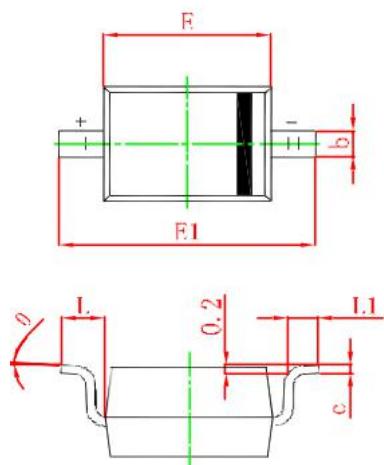SOD-323

Symbol	Min.(mm)	Max.(mm)
A		1.000
A1	0.000	0.100
A2	0.800	0.900
b	0.250	0.350
c	0.080	0.150
D	1.200	1.400
E	1.600	1.800
E1	2.500	2.700
L	0.475REF	
L1	0.250	0.400
θ	0°	8°